



# INNOLUX DISPLAY CORPORATION

## MT200LW01 V.A LCD MODULE SPECIFICATION

( ) Preliminary Specification

(●) Final Specification

<i>Approved by</i>	<i>Checked by</i>	<i>Prepared by</i>

**Innolux Display Corporation,**

**No.160 Kesyue Rd., Chu-Nan Site, Hsinchu Science Park,**

**Chu-Nan 350, Miao-Li County, Taiwan**

**Tel: 886-37-586000**

**Fax: 886-37-586060**

**Document Number: MT200LW01 V.A-DR4-26**



# INNOLUX DISPLAY CORPORATION

## MT200LW01 V.A LCD MODULE SPECIFICATION

Department		Prepared by	Checked by
MKT			
PD	EE		
	ME		
TD			
RA			

Innolux Display Corporation

Document Number: MT200LW01 V.A-DR4-26

**Version:1.0**

InnoLux copyright  
All rights reserved,  
Copying forbidden.

## Record of Revision

Version	Revise Date	Page	Content
1.0	2009/12/16	All	First edition to all Final-Spec.



SPEC NO. MT200LW01 V.A

PAGE 4/24

**Contents:****A. General Specification****B. Electrical Specifications**

1. Pin assignment

2. Absolute maximum ratings

3. Electrical characteristics

a. Typical operating conditions

b. Display color vs. input data signals

c. Input signal timing

d. Display position

e. Backlight driving conditions

**C. Optical specifications****D. Reliability test items****E. Safety****F. Display quality****G. Handling precaution****H. Label****I. Mechanical drawings****Appendix**



SPEC NO. MT200LW01 V.A

PAGE 5/24

**16 General specification**

NO.	Item	Specification	Remark
1	Display resolution (pixel)	1600(H) x 900(V),HD+ resolution	
2	Active area (mm)	442.8(H)x 249.075(V)	
3	Screen size (inch)	20 inches diagonal	
4	Pixel pitch (mm)	0.2768 (H) x 0.2768 (V)	
5	Color configuration	R, G, B vertical stripe	
6	Overall dimension (mm)	462.8 (H)x272.0(W) x17 (D) (Typ)	Note 1
7	Weight (g)	1850(Typ)	
8	Surface treatment	Anti-Glare, Haze=25%, Hard coating (3H)	Note 2
9	Power consumption	17.85W(Typ)	
10	Input color signal	8 bit LVDS	
11	Display colors	16.7M (6 bit with Hi-FRC)	
12	Color saturation	72% NTSC	
13	Optimum viewing direction	6 o'clock	
14	Backlight	2 CCFL	
15	RoHS & Halogen free	RoHS & Halogen free compliance	
16	TC0'5.0	TC0'5.0 Compliance	Note 3

Note 1: Depth is 17mm(TYP)+/-0.5mm

Note 2: Glare Option available.

Note 3: Anti-Glare model only.



SPEC NO. MT200LW01 V.A

PAGE 6/24

## B. Electrical specifications

### 1.Pin assignment


#### Connector

FOXCONN GS23302-0311S-7F or mechanical interface equivalent connector.

Pin No	Symbol	Description
Frame	VSS	Ground
1	RXinO0-	-LVDS differential data input, Chan 0-Odd
2	RXinO0+	+LVDS differential data input, Chan 0-Odd
3	RXinO1-	-LVDS differential data input, Chan 1-Odd
4	RXinO1+	+LVDS differential data input, Chan 1-Odd
5	RXinO2-	-LVDS differential data input, Chan 2-Odd
6	RXinO2+	+LVDS differential data input, Chan 2-Odd
7	VSS	Ground
8	RXOC-	-LVDS differential Clock input (Odd)
9	RXOC+	+LVDS differential Clock input (Odd)
10	RXinO3-	-LVDS differential data input, Chan 3-Odd
11	RXinO3+	+LVDS differential data input, Chan 3-Odd
12	RXinE0-	-LVDS differential data input, Chan 0-Even
13	RXinE0+	+LVDS differential data input, Chan 0-Even
14	VSS	Ground
15	RXinE1-	-LVDS differential data input, Chan 1-Even
16	RXinE1+	+LVDS differential data input, Chan 1-Even
17	VSS	Ground
18	RXinE2-	-LVDS differential data input, Chan 2-Even
19	RXinE2+	+LVDS differential data input, Chan 2-Even
20	RXEC-	-LVDS differential Clock input (Even)
21	RXEC+	+LVDS differential Clock input (Even)
22	RXinE3-	-LVDS differential data input, Chan 3-Even
23	RXinE3+	+LVDS differential data input, Chan 3-Even
24	VSS	Ground
25	NC	No Connection
26	NC	No Connection
27	NC	No Connection
28	VCC	+5.0V power supply
29	VCC	+5.0V power supply
30	VCC	+5.0V power supply
Frame	VSS	Ground

SPEC NO. MT200LW01 V.A

PAGE 7/24

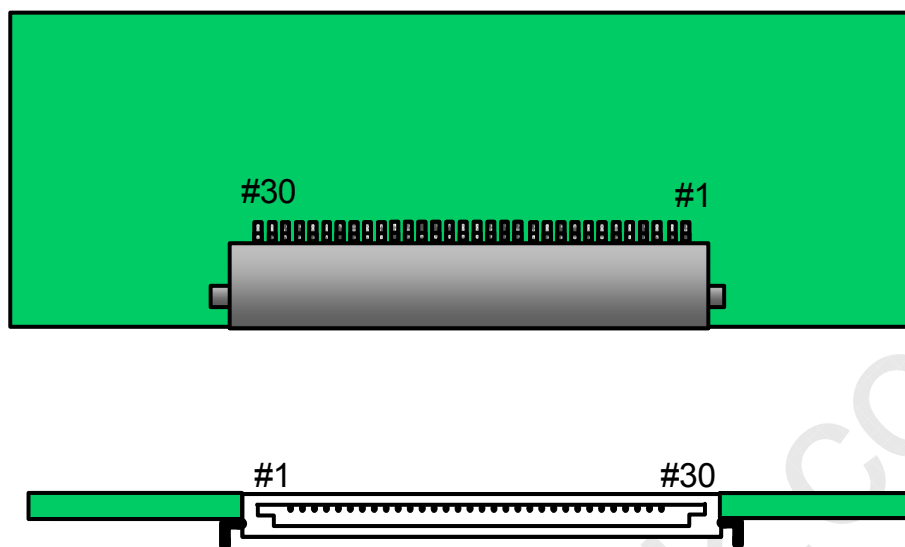

Rear view of LCM

SPEC NO. MT200LW01 V.A

PAGE 8/24


## 2. Absolute maximum ratings

Parameter	Symbol	Values			Unit	Remark
		Min.	Typ.	Max.		
Power voltage	$V_{CC}$	-0.3	-	6.0	V	At 25°C
Input signal voltage	$V_{LH}$	-0.3	-	4.3	V	At 25°C
Operating temperature	$T_{op}$	0	-	50	°C	Note 1
Storage temperature	$T_{ST}$	-20	-	60	°C	Note 2
CCFL Current	ICFL	2.0	7.5	8	[mA]	

Note 1: The relative humidity must not exceed 90% non-condensing at temperatures of 40°C or less.

At temperatures greater than 40°C, the wet bulb temperature must not exceed 39°C.

Note 2: The unit should not be exposed to corrosive chemicals.

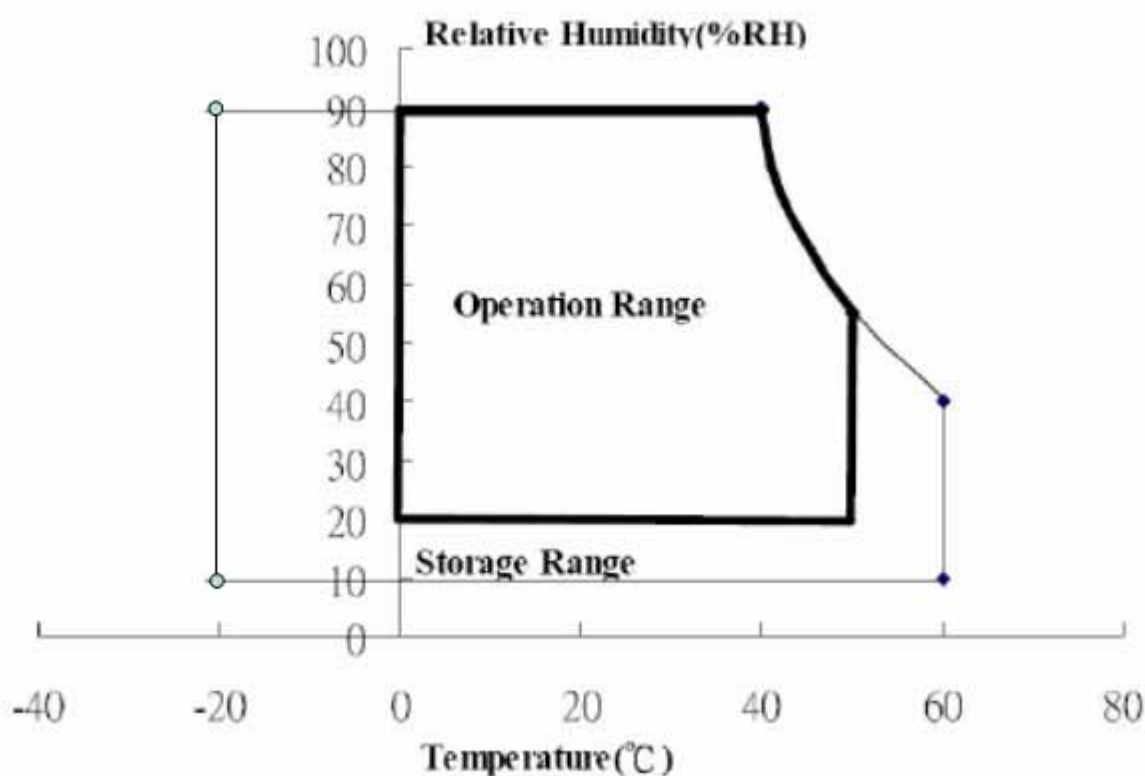

SPEC NO. MT200LW01 V.A

PAGE 9/24

## 3. Electrical characteristics

## a. Typical operating conditions

Item		Symbol	Min.	Typ.	Max.	Unit	Remark
Input Voltage		$V_{CC}$	4.5	5	5.5	V	
Permissive Power Input Ripple		$V_{RF}$	-	-	0.15	V	
Input Current	Black	$I_{CC}$	-	800	1200	mA	Note 1
	White	$I_{CC}$	-	600	900		Note 2
	Mosaic	$I_{CC}$	-	750	1100		Note 3
Rush Current		$I_{Rush}$	-	1.6	3	A	Note 4
Logic Input Voltage LVDS: IN+, IN-	Common Mode Voltage	VCM	-	1.2	-	V	
	Differential Input Voltage	VID	100	-	600	mV	
	Threshold Voltage (High)	VTH	-	-	100	mV	Note 5
	Threshold Voltage (Low)	VTL	-100	-	-	mV	Note 5


Note 1 : The specified current is under the  $V_{CC}=5V$ ,  $25^{\circ}C$ ,  $f_v=60Hz$  (frame frequency) condition whereas black pattern is displayed.

Note 2 : The specified current is under the  $V_{CC}=5V$ ,  $25^{\circ}C$ ,  $f_v=60Hz$  (frame frequency) condition whereas white pattern is displayed.

Note 3 : The specified current is under the  $V_{CC}=5V$ ,  $25^{\circ}C$ ,  $f_v=60Hz$  (frame frequency) condition whereas mosaic pattern(black & white [8\*6] ) is displayed.

White : 255 Gray

Black : 0 Gray

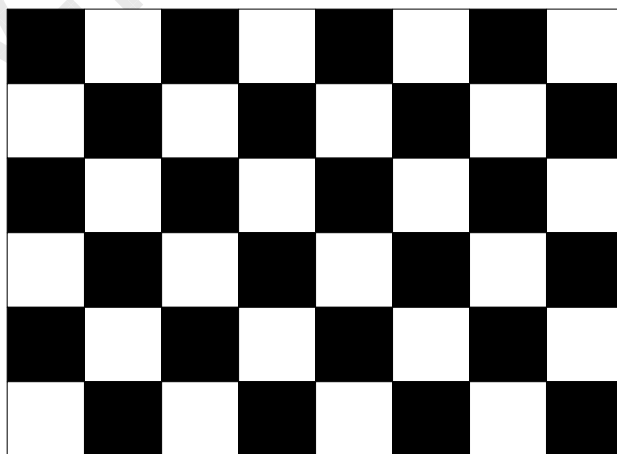


SPEC NO. MT200LW01 V.A

PAGE 10/24


Note 4 : test condition :

(1)  $V_{DD} = 5\text{ V}$ ,  $V_{DD}$  rising time =  $470\text{ }\mu\text{s} \pm 10\%$ 


(2) Pattern: Mosaic pattern

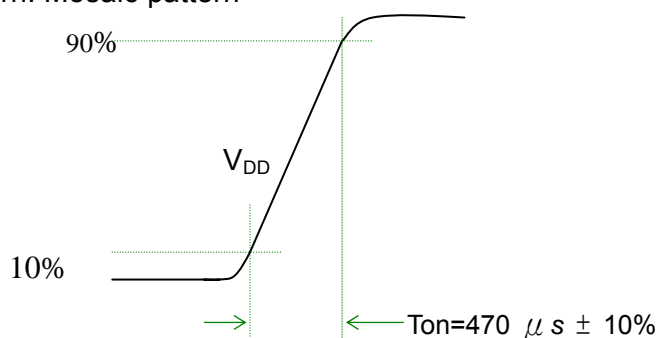

(3) Test circuit

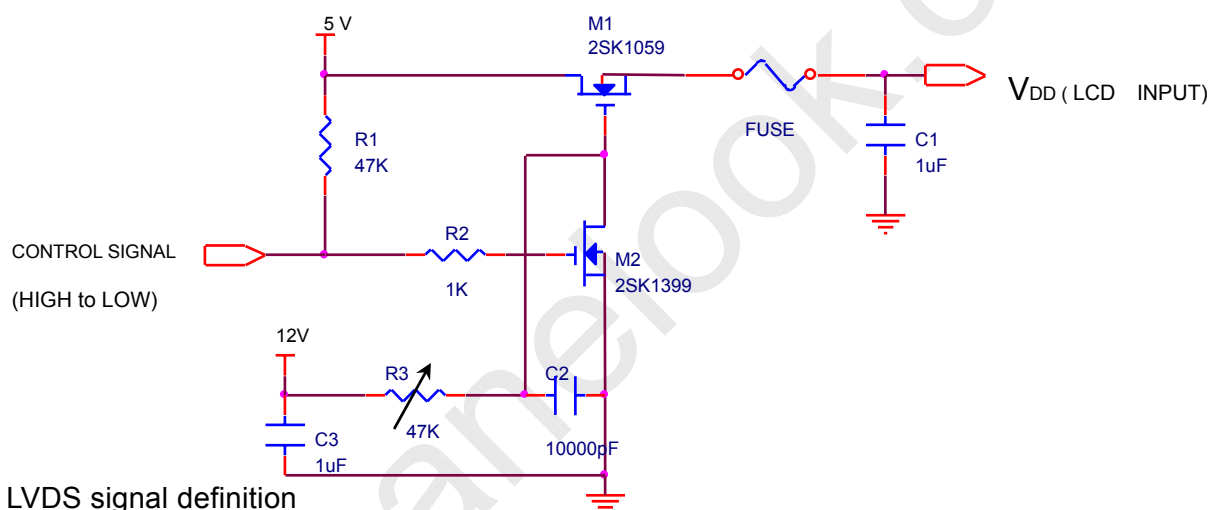


Note 5: LVDS signal definition

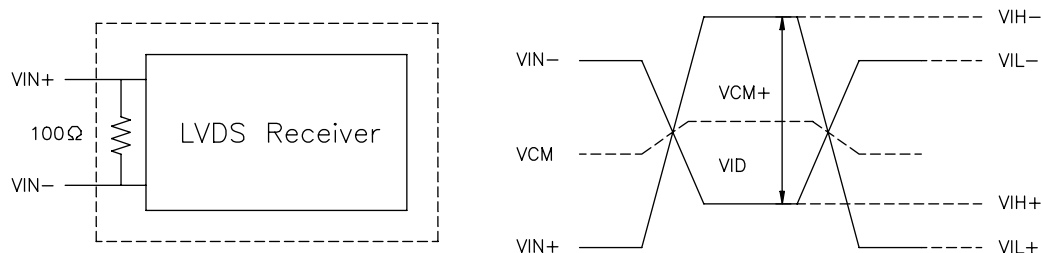 $VIN_+$  = Positive differential DATA & CLK Input $VIN_-$  = Negative differential DATA & CLK Input $VID = VIN_+ - VIN_-$ , $\Delta V_{CM} = |V_{CM+} - V_{CM-}|$ , $\Delta VID = |VID_+ - VID_-|$ , $VID_+ = |V_{IH+} - V_{IH-}|$ , $VID_- = |V_{IL+} - V_{IL-}|$ , $V_{CM} = (VIN_+ + VIN_-)/2$ , $V_{CM+} = (V_{IH+} + V_{IH-})/2$ , $V_{CM-} = (V_{IL+} + V_{IL-})/2$ ,

SPEC NO. MT200LW01 V.A

PAGE 11/24

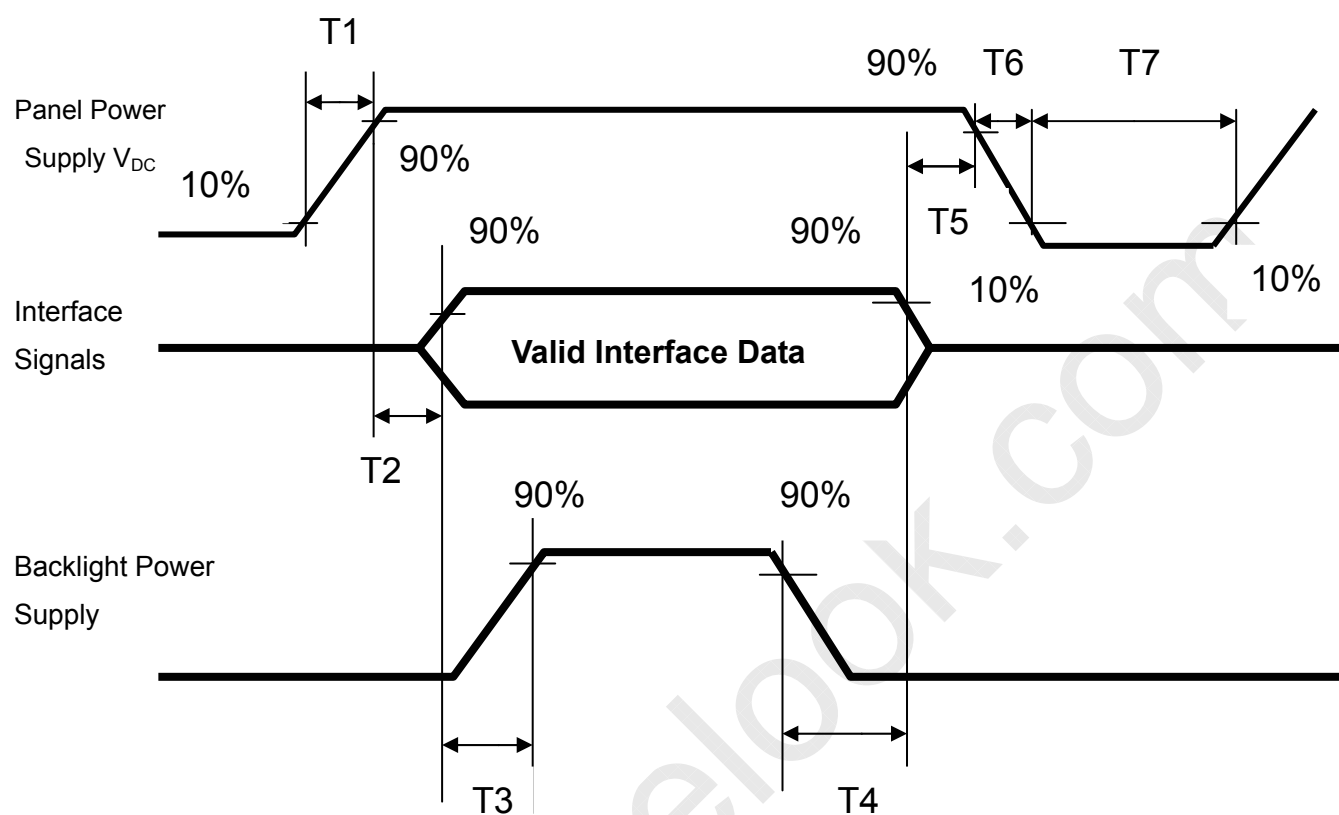Note 6 : Power on sequence for LCD  $V_{DD}$ 

Parameter	Value			Unit
	Min	Typ	Max	
T1	0.1	-	10	ms
T2	0	30	50	ms
T3	200	250	-	ms
T4	100	250	-	ms
T5	0	20	50	ms
T6	0.1	-	50	ms
T7	1000	-	-	ms



SPEC NO. MT200LW01 V.A

PAGE 12/24

## b. Display color vs. input data signals

The brightness of each primary color (red, green and blue) is based on the 8-bit gray scale data input for the color; the higher the binary input, the brighter the color. The table below provides a reference for color versus data input.

Color		Input color data																							
		Red								Green								Blue							
		MSB				LSB				MSB				LSB				MSB				LSB			
		R7	R6	R5	R4	R3	R2	R1	R0	G7	G6	G5	G4	G3	G2	G1	G0	B7	B6	B5	B4	B3	B2	B1	B0
Basic colors	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red(255)	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Green(255)	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	Blue(255)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	Cyan	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	Magenta	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Red	Red(000) dark	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red(001)	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red(002)	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	Red(253)	1	1	1	1	1	1	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red(254)	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red(255) bright	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Green	Green(000)dark	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Green(001)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0
	Green(002)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	Green(253)	0	0	0	0	0	0	0	0	1	1	1	1	1	1	0	1	0	0	0	0	0	0	0	0
	Green(254)	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0
	Green(255)bright	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
Blue	Blue(000) dark	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Blue(001)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
	Blue(002)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	Blue(253)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	0	1
	Blue(254)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0
	Blue(255) bright	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1

SPEC NO. MT200LW01 V.A

PAGE 13/24


## c. Input signal timing

Support Input Timing Table

	Item	Description	Min.	Typ.	Max.	Unit
Clock	Dclk	period	20.6	16.8	13.1	nS
		frequency	48.5	59.5	76.1	MHz
Vertical	$T_{V\_TOTAL}$	V total line number	905	926	942	$T_{H\_TOTAL}$
	$T_{V\_DATA}$	Data duration	—	900	—	$T_{H\_TOTAL}$
	$T_{VB}$	V-blank	5	26	42	$T_{H\_TOTAL}$
	$f_V$	frequency	50	60	75	Hz
Horizontal	$T_{H\_TOTAL}$	H total pixel number	950	1056	1150	DCIk
	$T_{H\_DATA}$	Data duration	—	800	—	DCIk
	$T_{HB}$	H-blank	150	256	350	DCIk

Note: Because this module is operated by DE only mode, Hsync and Vsync input signals should be set to low Logic level or ground. Otherwise, this module would operate abnormally.

## INPUT SIGNAL TIMING DIAGRAM

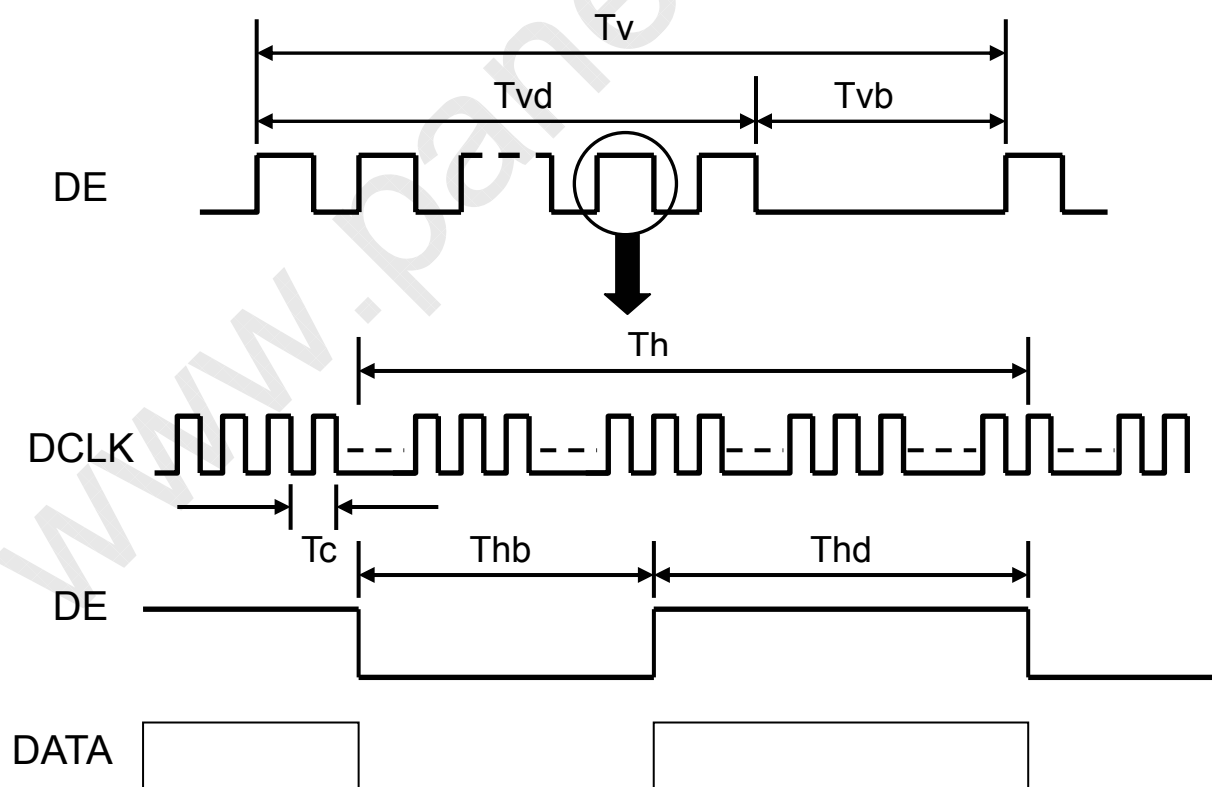

SPEC NO. MT200LW01 V.A

PAGE 14/24

## d. Display Position

D(1, 1)	D(2, 1)	.....	D(720, 1)	.....	D(1599, 1)	D(1600, 1)
D(1, 2)	D(2, 2)	.....	D(720, 2)	.....	D(1599, 2)	D(1600, 2)
⋮		.....	⋮	.....	⋮	⋮
D(1, 450)	D(2, 450)	.....	D(720, 450)	.....	D(1599, 450)	D(1600, 450)
⋮		.....	⋮	.....	⋮	⋮
D(1, 899)	D(2, 899)	.....	D(720, 899)	.....	D(1599, 899)	D(1600, 899)
D(1, 900)	D(2, 900)	.....	D(720, 900)	.....	D(1599, 900)	D(1600, 900)

## e. Backlight driving conditions


Parameter	Symbol	Min.	Typ.	Max.	Unit	Remark	Remark
Lamp voltage	VL	711	790	869	Vrms	I=7.5mA	Note 1
Lamp operation current	IL	2.0	7.5	8.0	mArms		Note 2
Lamp starting voltage	VLstart	1650	-	-	Vrms	T = 25°C	Note 3,4,5,6
		1800	-	-		T = 0°C	Note 3,4,5,6
Frequency	F	40	-	60	KHZ		Note 6
Lamp life time		50000	-	-	Hr		Note 7

Note: The waveform of the voltage output of inverter must be area-symmetric and the design of the inverter must have specifications for the modularized lamp. The performance of the Backlight, such as lifetime or brightness, is greatly influenced by the characteristics of the DC-AC inverter for the lamp. All the parameters of an inverter should be carefully designed to avoid producing too much current leakage from high voltage output of the inverter. When designing or ordering the inverter please make sure that a poor lighting caused by the mismatch of the Backlight and the inverter (miss-lighting, flicker, etc.) never occurs. If the above situation is confirmed, the module should be operated in the same manners when it is installed in your instrument.

Note 1: Lamp voltage is specified under  $I_L = 7.5 \text{ mArms}$ .

Note 2: The degree of unbalance: less than 10%

The ratio of wave height: less than  $\sqrt{2} \pm 10\%$

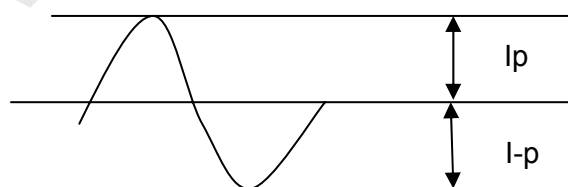

$I_p$ : high side peak

$I-p$ : low side peak

The degree of unbalance =  $|I_p - I-p| / I_{rms} \times 100(\%)$

The ratio of wave height =  $I_p$  (or  $I-p$ ) /  $I_{rms}$

Lamp should be completely turned on.

SPEC NO. MT200LW01 V.A

PAGE 15/24

Note 3: Test equipment: AS-114B

Note 4: The voltage shown above should be applied to the lamp for more than 1 second after startup. Otherwise, the lamp may not be turned on normally.

Note 5: Inverter should provide more than min. value, and then lamp could be completely turned on

Note 6: Lamp frequency may produce interference with horizontal synchronous frequency and this may cause line flow on the display. Therefore lamp frequency shall be detached from the horizontal synchronous frequency and its harmonics as far as possible in order to avoid interference.

Note 7: Life time (Hr) is defined as the time when brightness of a lamp unit itself becomes 50% or less than its original value at the condition of  $T_a = 25 \pm 2^\circ\text{C}$  and  $I_L = 7.5 \text{ mArms}$ .

Backlight connector: 3500IHS-02L

Pin no.	Symbol	Function	Remark
1	VIH	Lamp high voltage input	Cable color: Pink
2	VIL	Lamp low voltage input	Cable color: White
3	VIH	Lamp high voltage input	Cable color: Blue
4	VIL	Lamp low voltage input	Cable color: Black



SPEC NO. MT200LW01 V.A

PAGE 16/24

**C. Optical specifications**

Item	Symbol	Condition	Specification			Unit	Remark
			Min.	Typ.	Max.		
Response time	Tr	$\theta = 0^\circ$	-	1.5	4	ms	Note 4
	Tf		-	3.5	6		
	Tr+Tf		-	5	10		
Contrast ratio	CR	$\theta = 0^\circ$	700	1000	-		Note 3,5
Viewing angle	Top	$CR \geq 10$	70	80	-	deg.	Note 3,5,7
	Bottom	$CR \geq 10$	70	80	-		
	Left	$CR \geq 10$	75	85	-		
	Right	$CR \geq 10$	75	85	-		
Brightness (Center)	$Y_L$		200	250	-	nit	Note 3,6
Color chromaticity(CIE)	Wx	$\theta = 0^\circ$	-0.03	0.313	+0.03		Note 3
	Wy			0.329			
	Rx			0.648			
	Rv			0.336			
	Gx			0.294			
	Gv			0.607			
	Bx			0.145			
	By			0.064			
White uniformity (9)	$\delta_w$		0.75	0.80	-		Note 3,8
Cross talk	Ct		-	-	2%		Note 9

Note 1: Ambient temperature = 25°C.

Note 2: To be measured in dark room after backlight warm up 30 minutes.


Note 3: To be measured with a viewing cone of 2°by Topcon luminance meter BM-5A.

Note 4: Definition of response time:

The output signals of BM-7 are measured when the input signals are changed from “Black” to “White” (falling time) and from “White” to “Black” (rising time), respectively. The response time interval is between the 10% and 90% of amplitudes. Refer to figure as below.

SPEC NO. MT200LW01 V.A

PAGE 17/24

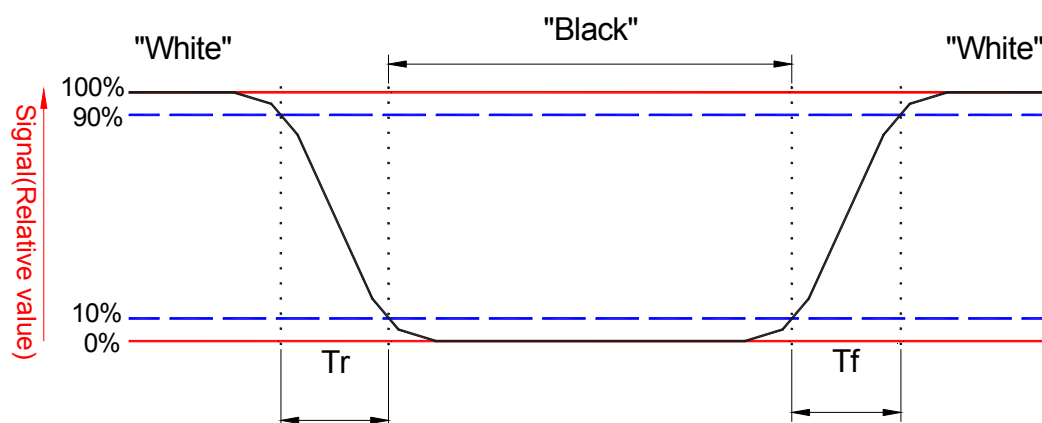


Note 5: Definition of contrast ratio:

Contrast ratio is calculated by the following formula.

$$\text{Contrast ratio (CR)} = \frac{\text{Brightness on the "white" state}}{\text{Brightness on the "black" state}}$$

Note 6: Driving conditions for CCFL:  $I_L = 7.5 \text{ mA}$ , 50 KHz Frequency.

Note 7: Definition of viewing angle

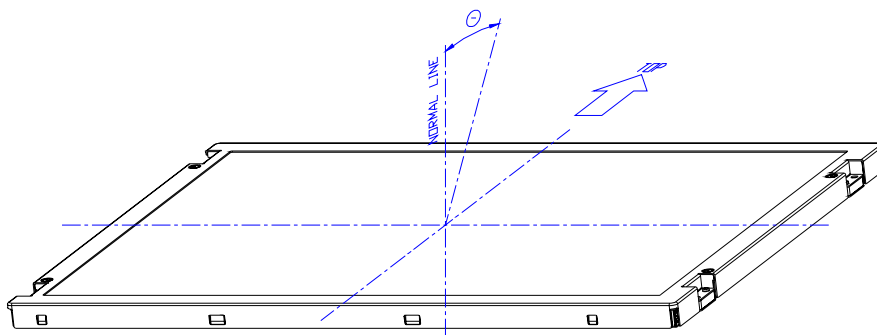


Note 8: Definition white uniformity:

Luminance are measured at the following nine points (P1~P9).


$$\delta_w = \frac{\text{Minimum Brightness of nine points (P1~P9).}}{\text{Maximum Brightness of nine points (P1~P9).}}$$

SPEC NO. MT200LW01 V.A

PAGE 18/24

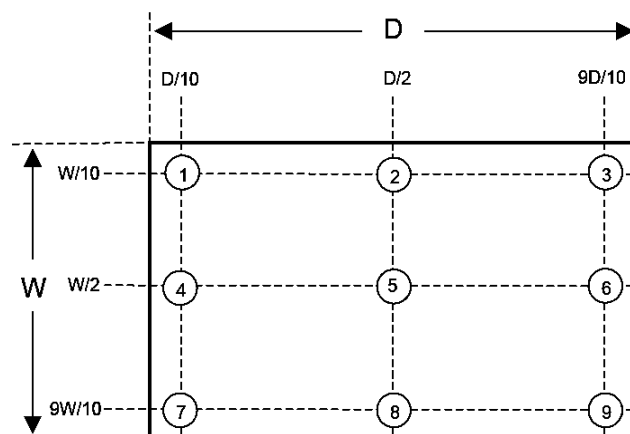


Note 9:

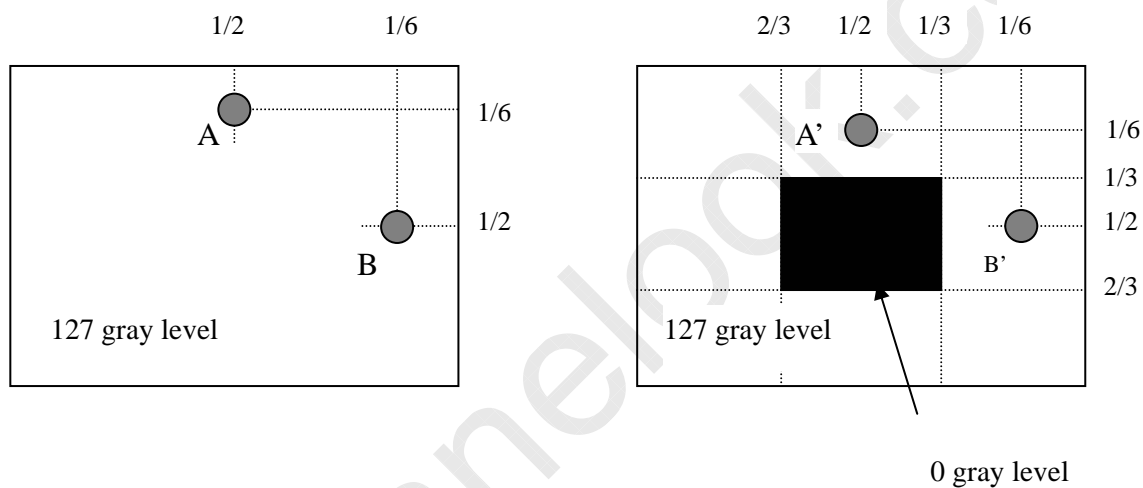

$$|L_A - L_{A'}| / L_A \times 100\% = 2\% \text{ max.}, L_A \text{ and } L_{A'} \text{ are brightness at location A and A'}$$

$$|L_B - L_{B'}| / L_B \times 100\% = 2\% \text{ max.}, L_B \text{ and } L_{B'} \text{ are brightness at location B and B'}$$

Note 10: Optical characteristic measurement setup.

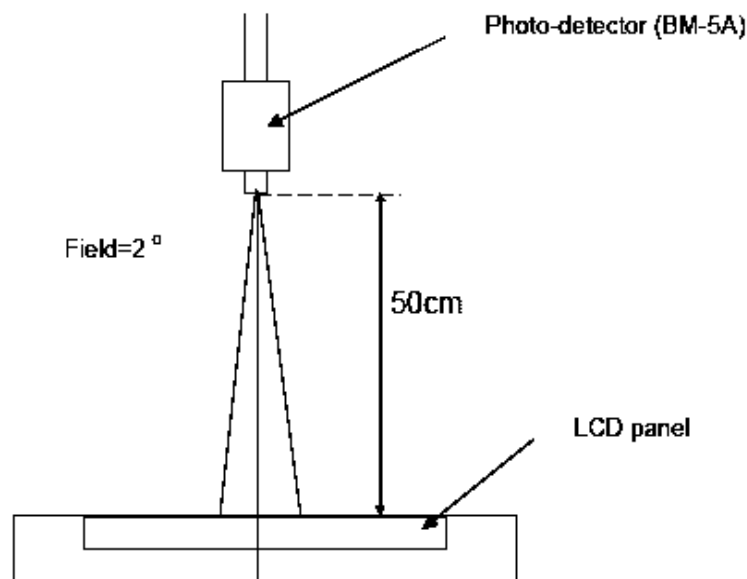



SPEC NO. MT200LW01 V.A

PAGE 19/24

**D. Reliability test items**

Test Item	Test Condition	Judgment	Remark
High temperature & high humidity operation	40°C, 90%RH, 240Hrs (No condensation)	Note 1	Note 2
High temperature operation	50°C, 240Hrs	Note 1	Note 2
Low temperature operation	0°C, 240Hrs	Note 1	Note 2
Thermal Shock (non-operation)	-20°C~60°C 1Hr, 1Hr, 100cycles	Note 1	Note 2
Electrostatic discharge (ESD)	Contact: +/-8kV, 150pF(330ohms), 16 points, 10 times/1 point, 1 time/1 sec Air discharge: +/-15kV, 150pF(330ohms), 9points, 10 times/1 point, 1 time/1 sec	Note 1	Note 2
Vibration (non-operation)	Vibration level : 1.5G Bandwidth : 10-300Hz Waveform : sine wave, sweep rate : 10min 30 min for each direction X, Y, Z (1.5 Hrs in total)	Note 1	Note 2
Mechanical Shock (non-operation)	Shock level : 50G, 11ms Waveform : Half sine wave Direction : ±X, ±Y, ±Z One time each direction	Note 1	Note 2
MTBF Demonstration	50,000 hours (Min.) with confidence level 90%	Note 1	Note 3

Note1: Pass: Normal display image with no obvious non-uniformity and no line defect.

Partial transformation of the module parts should be ignored.

Fail: No display image, obvious non-uniformity, or line defects.

Note2: Evaluation should be tested after storage at room temperature for one hour.

Note 3: The MTBF calculation is based on the assumption that the failure rate distribution meets the Exponential Model (CCFL excluded)

SPEC NO. MT200LW01 V.A

PAGE 20/24

## **E. Safety**

### **(1) Sharp Edge Requirements**

There will be no sharp edges or corners on the display assembly that could cause injury.

### **(2) Materials**

#### **a. Toxicity**

There will be no carcinogenic materials used anywhere in the display module. If toxic materials are used, they will be reviewed and approved by the responsible InnoLux Toxicologist.

#### **b. Flammability**

All components including electrical components that do not meet the flammability grade UL94-V1 in the module will complete the flammability rating exception approval process. The printed circuit board will be made from material rated 94-V1 or better. The actual UL flammability rating will be printed on the printed circuit board.

#### **c. Capacitors**

If any polarized capacitors are used in the display assembly, provisions will be made to keep them from being inserted backwards.

## **F. Display quality**


The display quality of the color TFT-LCD module should be in compliance with the Innolux's Incoming inspection standard.

## **G. Handling precaution**

The Handling of the TFT-LCD should be in compliance with the Innolux's handling principle standard.


SPEC NO. MT200LW01 V.A

PAGE 21/24

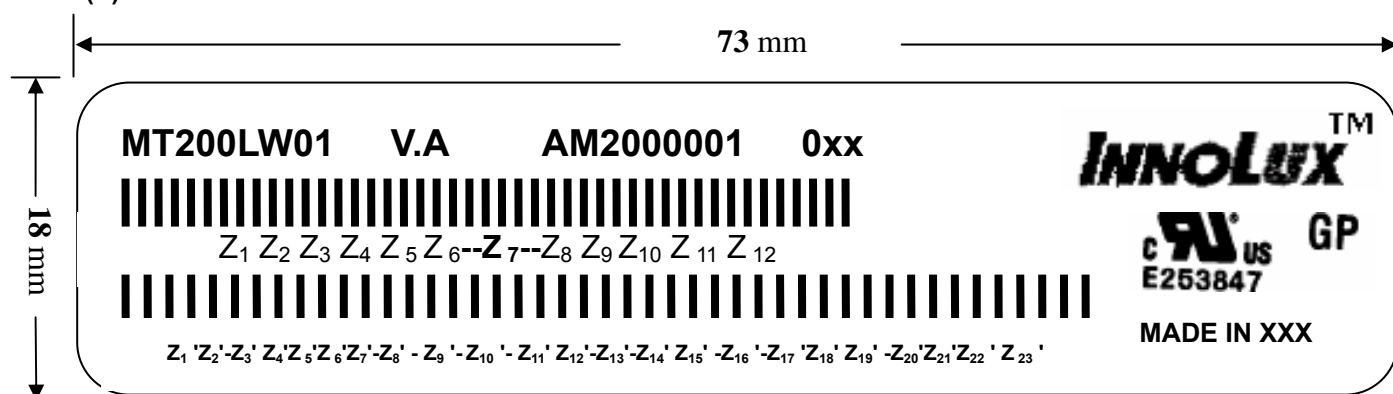**H. Label****(1) Module Label**

(a) Model Number: MT200LW01

(b) Version: V.A

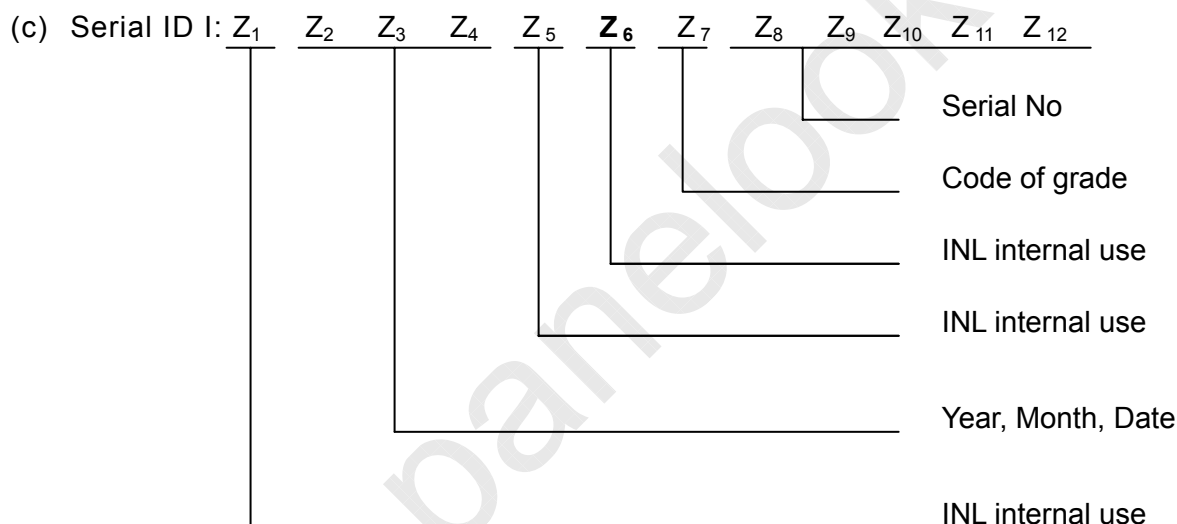

Serial ID includes the information as below:


1. Manufactured Date: Year: 0~9, for 2000~2009
2. Month: 1~9 & A~C for Jan.~Dec.
3. Date: 1~9 & A~Z (exclude I, O, Q, U) for 1st~31th
4. Code of grade: 1, 2, 3, 5, E
5. Serial No: Module manufacture sequence no

(d) Serial ID II (INL internal use)

SPEC NO. MT200LW01 V.A

PAGE 22/24


## (2) Carton Label

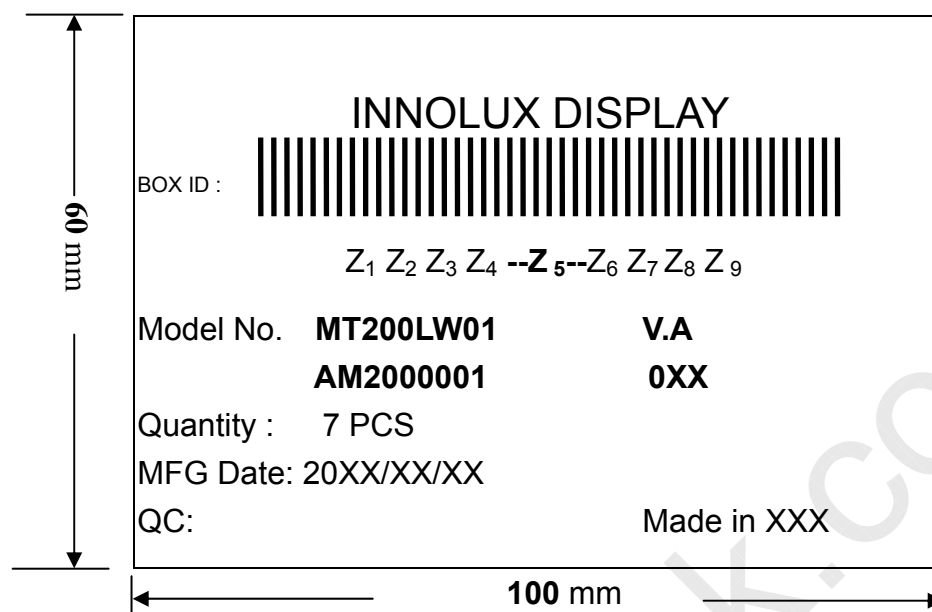

(a) Model Number: MT200LW01

(b) Version: V.A

(c) Packing quantity: 7 pcs

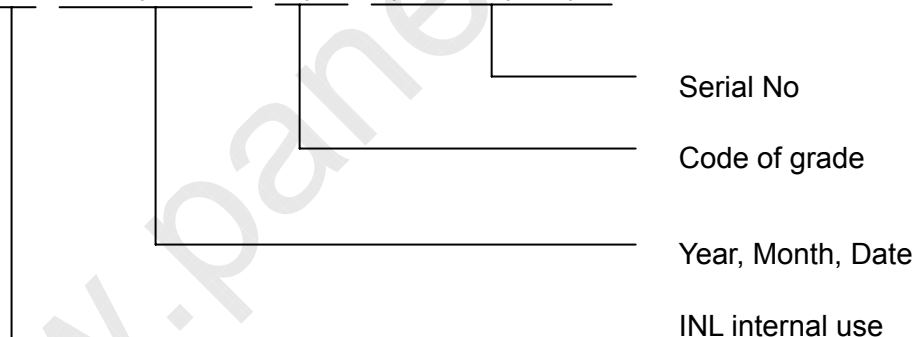(d) Serial ID: Z<sub>1</sub> Z<sub>2</sub> Z<sub>3</sub> Z<sub>4</sub> Z<sub>5</sub> Z<sub>6</sub> Z<sub>7</sub> Z<sub>8</sub> Z<sub>9</sub>

Serial ID includes the information as below:

(a) Manufactured Date: Year: 0~9, for 2000~2009

Month: 1~9 &amp; A~C for Jan.~Dec.

Date: 1~9 &amp; A~Z (exclude I, O, Q, U) for 1st~31th

(b) Code of grade: 1,2, 3, 5, E

(c) Serial No: Module packing sequence no

NOTES:  
1.BACKLIGHT-2 COLD CATHODE FLUORESCENT LAMPS  
2.I/F CONNECTOR SPEC: FOXCONN GS23302-001R-7F OR COMPATIBLE  
3.LAMP CABLE CONNECTOR TO BE 013-1002-4089 (2 pins>Foxconn) OR COMPATIBLE.  
4.TORQUE OF M3 USER HOLE SHOULD BE WITHIN 4 kgf-cm.5 TIMES  
5.THE DIMENSION EXCLUDES DEFORMATION  
6.TOLERANCE WITHOUT NOTE IS ±0.5MM  
7.DO NOT WIND CONDUCTIVE TAPE AROUND THE BACKLIGHT WIRES  
8.MODULE'S THICKNESS IS LESS THAN 17.5MM

[illegible]